


kreon deco wall concept



kreon vergo

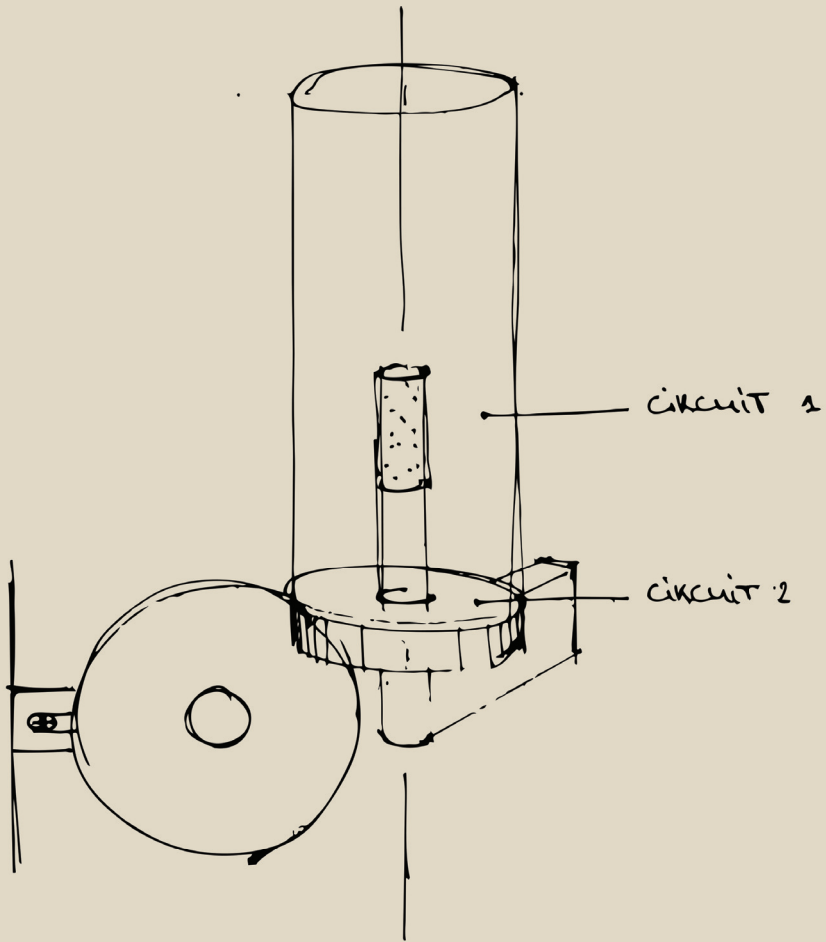

kreon vergo



vergo directional



vergo cone 1



vergo cone 2



colour temperature

directional 2700K, 3000K
cone 2700K



CRI

CRI90



ingress protection

IP67



lumen output @ 2700K

directional 361 lm
cone 350 lm



function

outdoor
24V plug&play system
directional
ambient downlight



beam angle

dark light 20°
wide dark light 38°
diffuse



colour

black




(other RAL-colours on request)



kreon nanotrack




kreon nanotrack

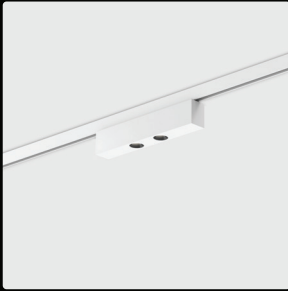

stripe on-nanotrack



linear reflector on nano-track

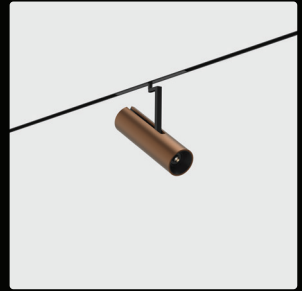

holon 20 directional on-nanotrack



application

ceiling & wall
surface, recessed and
pendant mounted



function

ultra-compact
low voltage track system



colour


white & black



technical

48V

DALI dimming
(individual control of each fixture)

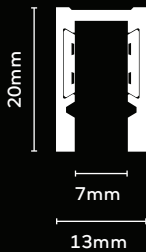


kreon stark 60




kreon stark 60



stark 60 directional, white
with trim



stark in-line 60 downlight, black,
trimless



stark in-line 60 directional,
bronze, trimless



colour temperature

CCT options	2400K, 2700K, 3000K, 3500K, 4000K
dim-to-warm	1800K - 2700K
tunable white	2700K - 5000K



CRI

CRI 97
high CRI LED engines
for accurate colour rendering



lumen output
> 1000 lm



UGR

UGR ≤ 12

low glare optics with refined cut-off



beam angle

narrow spot	12°
spot	18°
narrow flood	26°
medium flood	38°
wide flood	51°



efficiency

> 100 lm/W



colour

paintable


brushed plated




kreon stark 80




kreon stark 80



stark 80 directional, black
with trim

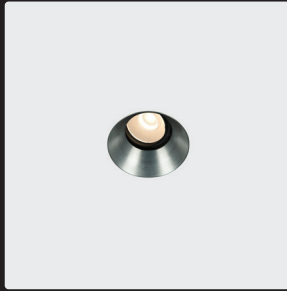

stark in-line 80 directional, silver,
trimless

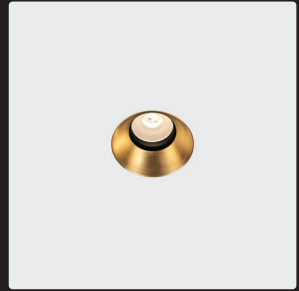

stark in-line 80 downlight, gold,
trimless



colour temperature

CCT options	2400K, 2700K, 3000K, 3500K, 4000K
dim-to-warm	1800K - 2700K
tunable white	2700K - 5000K



CRI

CRI 97
high CRI LED engines
for accurate colour rendering



lumen output
> 1700 lm



UGR

UGR ≤ 12
low glare optics with refined cut-off



beam angle

narrow spot	10°
spot	15°
narrow flood	23°
medium flood	33°
wide flood	54°



efficiency
> 115 lm/W



colour


paint
brushed plated




kreon noite custom




kreon noite custom



noite base profile



noite layer profile



noite recessed profile



application

ceiling

surface mounted
trimless recessed mounted



function

made-to-measure profile system



technical

noite base profile, 230V

input	230Vac
max power	150W
power supply	included

noite base/layer profile, 48V

input	48Vdc
power supply	remote



colour

painted
anodized



height

noite base profile 60mm

noite layer profile 36mm



kreon noite custom



noite modules



colour temperature
2700K & 3000K



CRI
CRI 90+ (*HE)
CRI 95+



UGR
low glare (< 19)



lumen output (per light source) @ 2700K
dark light up to 306lm
*high efficiency (HE) up to 450lm



beam angle


dark light	36°
wide dark light	60°
flood (*HE)	32°
wide flood (*HE)	52°



number of light sources
from 1 up to 8




kreon noite custom



holon 20 directional in-noite



holon 20 directional twin in-noite

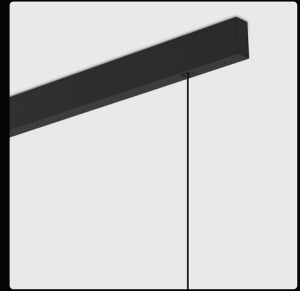

holon 20 pendant in-noite



colour temperature
2700K & 3000K



function
CRI 90+



UGR
low glare (< 19)



lumen output @ 2700K
±260lm / fixture



beam angle

spot	15°
dark light	36°
wide dark light	60°



colour

white	grey		
light grey	yellow	orange	dark grey



kreon noite standard



noite base module



application

ceiling

surface mounted profile system



CRI

CRI 95+



colour temperature

2700K & 3000K



lumen output (per light source) @ 2700K

dark light (36°)

up to 306lm



standard lengths

1800mm - 2400mm - 3000mm



technical

input 230Vac



height

60mm



colour

painting

anodized



UGR

low glare (< 19)



kreon noite standard



noite units



application

surface mounted downlight



CRI

CRI 95+



colour temperature

2700K & 3000K



lumen output (per light source) @ 2700K

dark light (36°) up to 306lm



number of light sources

2, 3 or 4



technical

constant current driver on remote



height

36mm



colour

painted
anodized



UGR


low glare (< 19)



kreon up 40 linear



kreon up 40 linear



up 40 linear diffuse & wallgrazer



up 40 linear diffuse, double



up 40 linear wallgrazer, double



colour temperature

2700K



CRI

CRI90+



IP

IP67



lumen output @ 2700K

diffuse 140 lm

wallgrazer 633 lm



function

diffuse uplight
wallgrazer



application

recessed in-ground
surface wall





colour

black



kreon wall concept

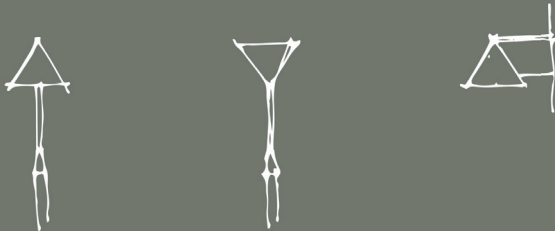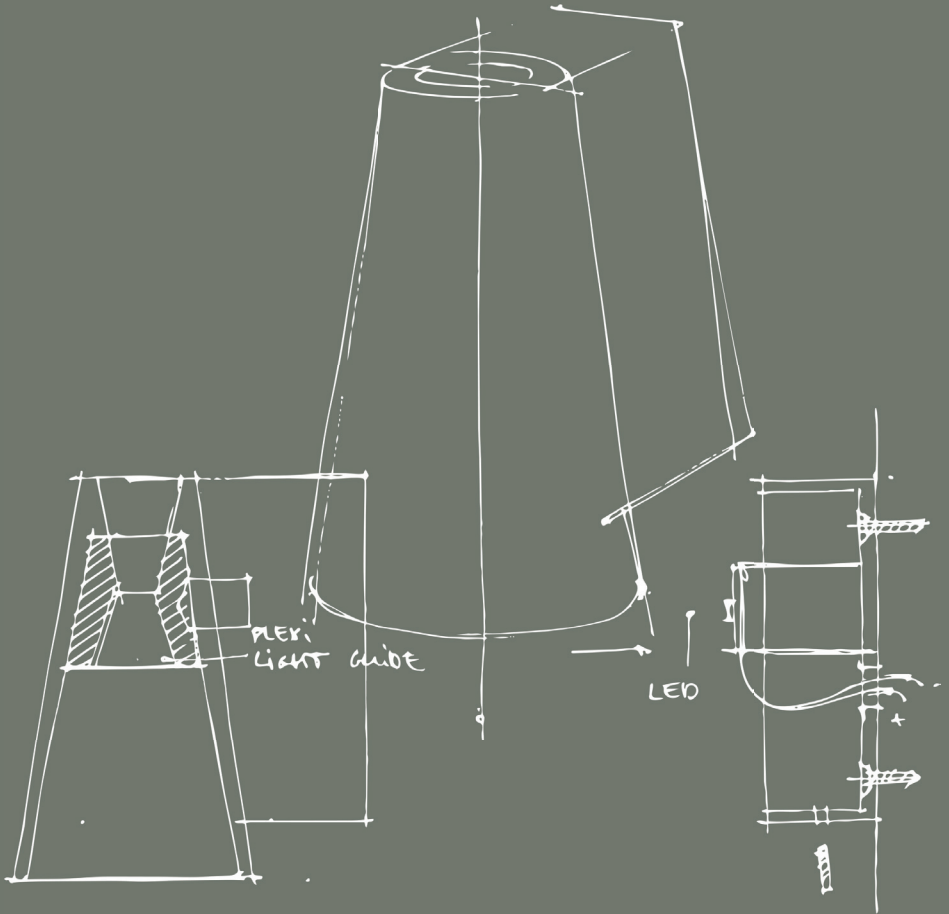



kreon directional concept

